2. Disassembly and Reassembly

2-1. Disassembly Instructions

1. Unscrew the screws **A** and **B**, as shown in Figure 2-1.

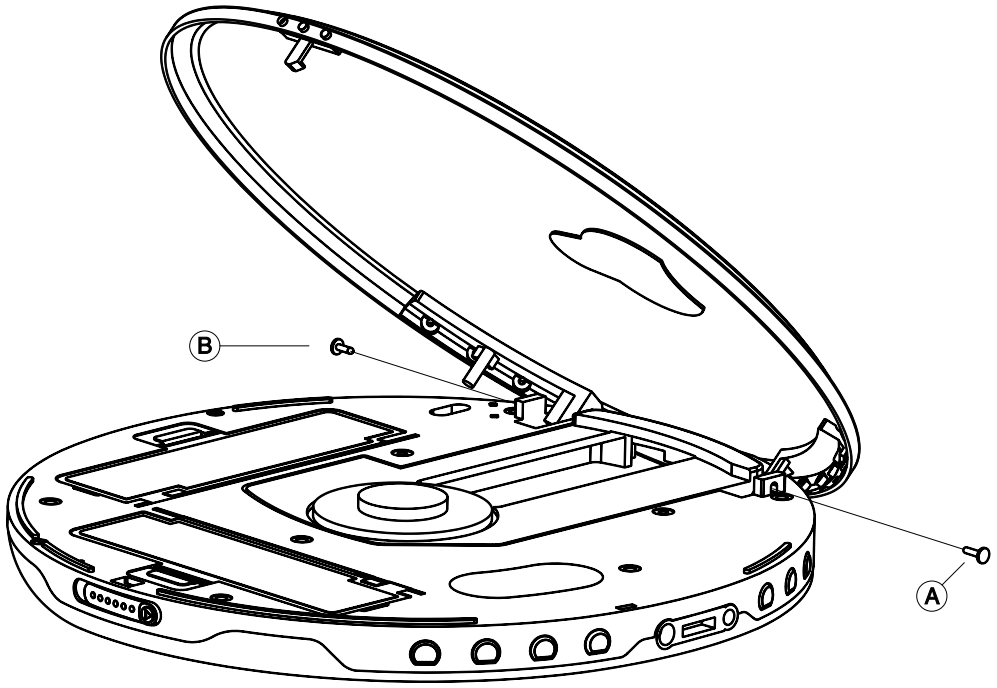

[Figure 2-1]

2. Use a pair of tweezers to disassemble the bracket hinges **C** and **D**, as shown in Figure 2-2. Tilt the hinge at a 45 degree angle to remove it.

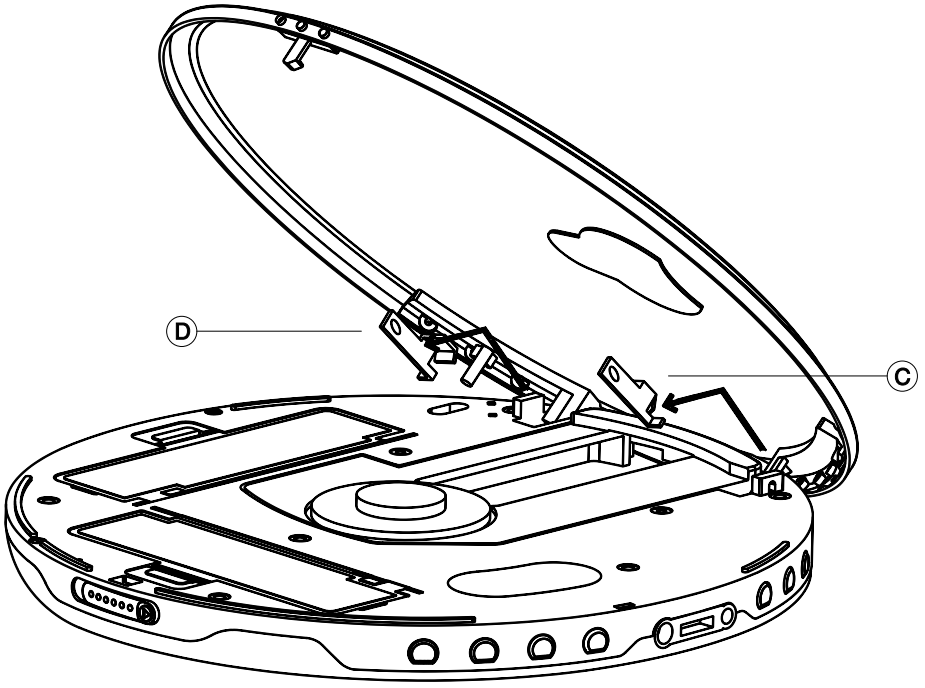

[Figure 2-2]

3. Grab the left and right sides of the cabinet door with one hand and pull it forward as you remove it, as shown in Figure 2-3

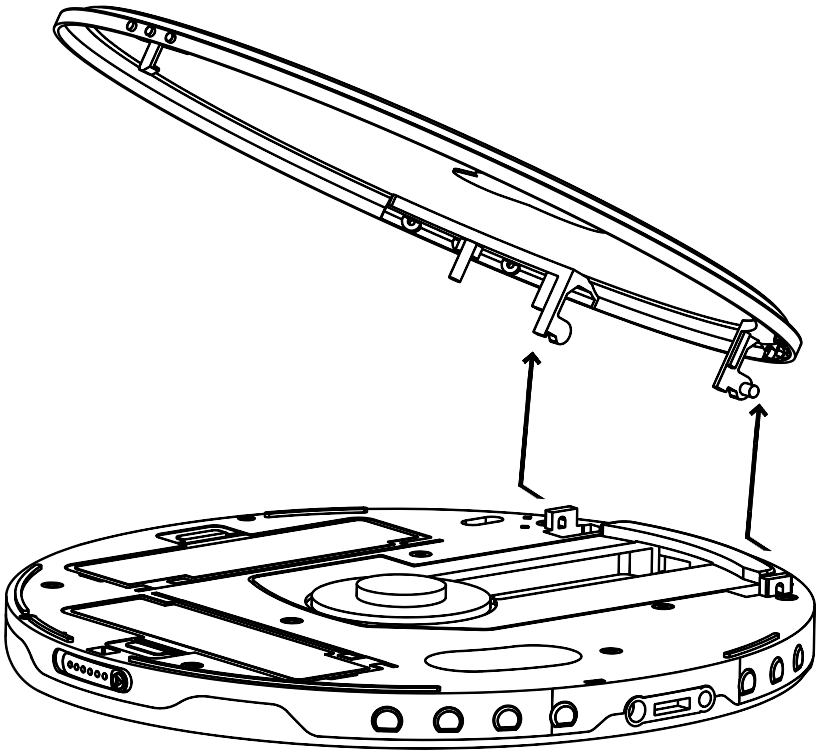

[Figure 2-3]

4. Unscrew the eight screws to remove the cabinet middle from the cabinet bottom, as shown in Figure 2-4.

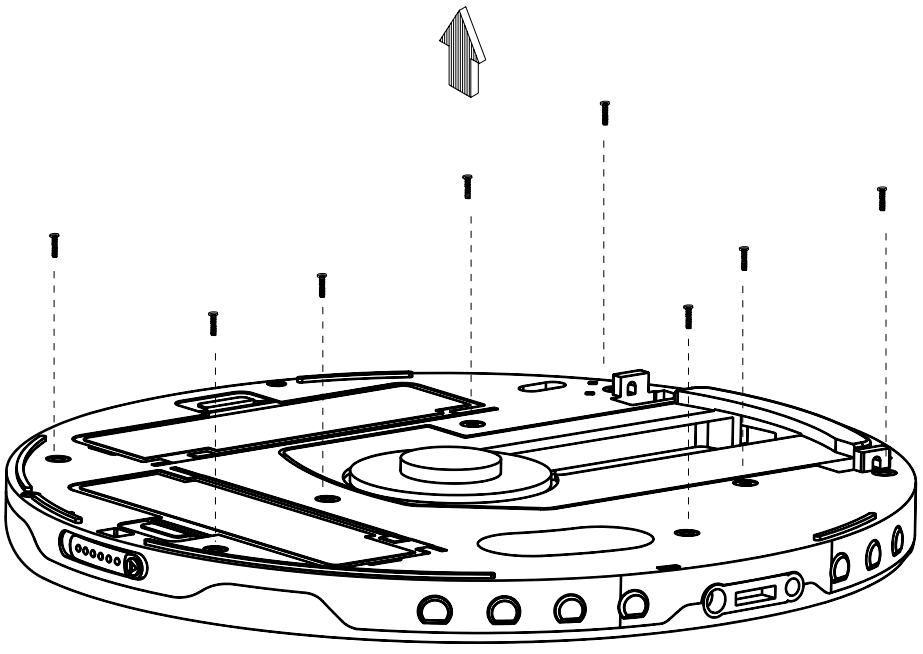

[Figure 2-4]

2-2. Reassembly Instructions

1. Using the eight screws, fasten the cabinet middle to the cabinet bottom, as shown in Figure 2-5

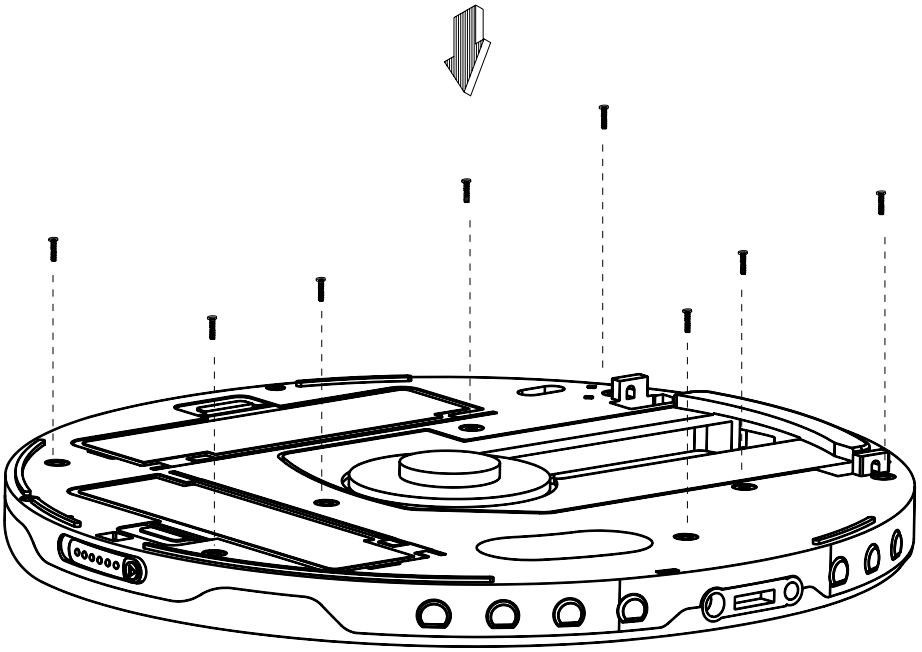

[Figure 2-5]

2. Grab the left and right sides of the cabinet door, align the spring part at the bottom left with the groove, and then push the cabinet door back as you press it down to fit it into the left and right grooves, as shown in Figure 2-6.

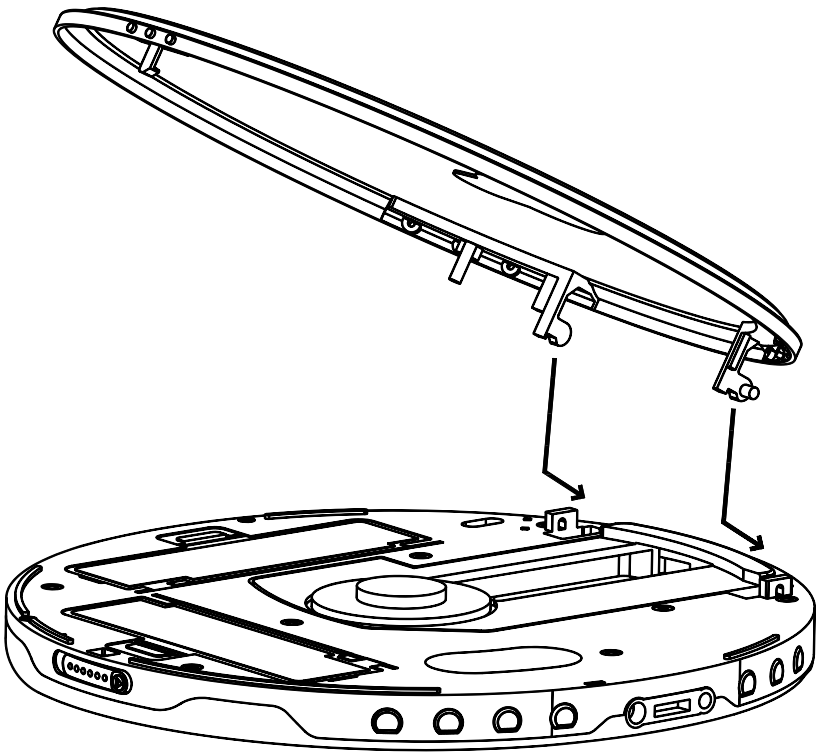

[Figure 2-6]

3. Tilt and insert the bracket hinge at a 45 degree angle to attach the cabinet door to the cabinet middle, as shown in Figure 2-7. Start with the bracket hinge **C** first.

This part of the assembly requires a bit of maneuvering. Please refer to the steps below.

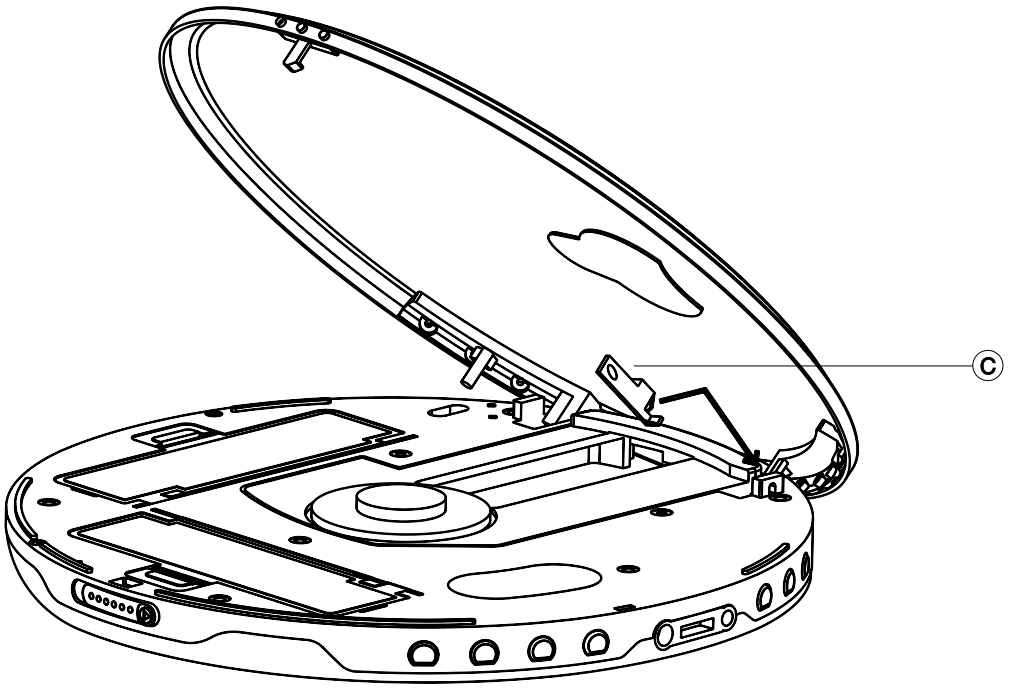

[Figure 2-7]

4. Tilt the bracket hinge at a 45 degree angle and position it as shown in Figure 2-8.

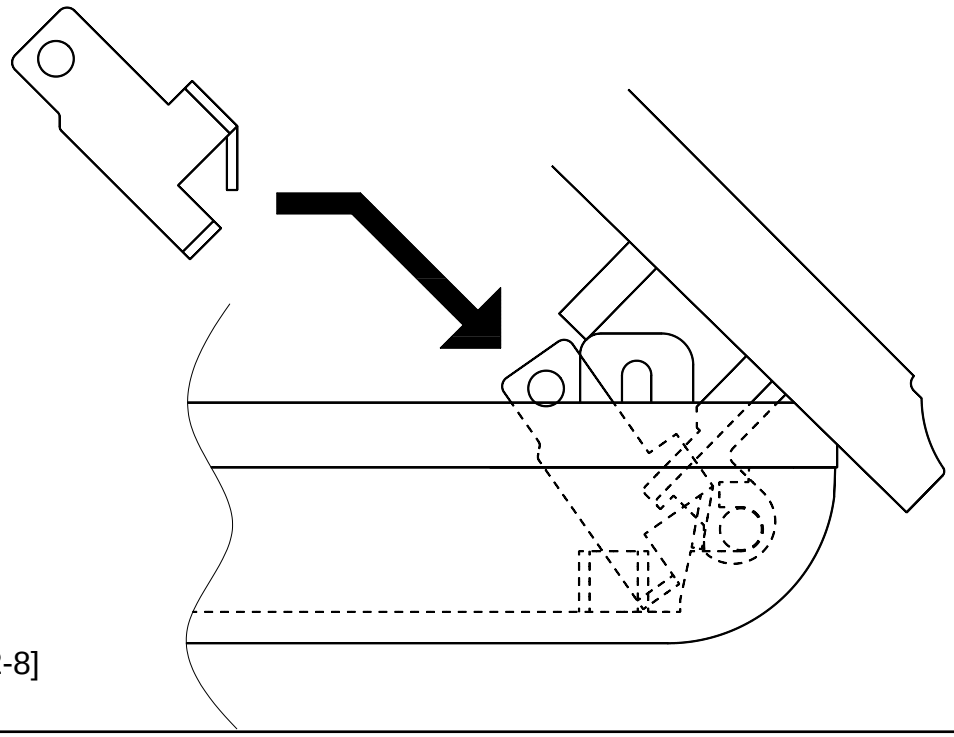

[Figure 2-8]

5. With the cabinet door slightly closed, gently push in the bracket hinge with your finger, as shown in Figure 2-9.

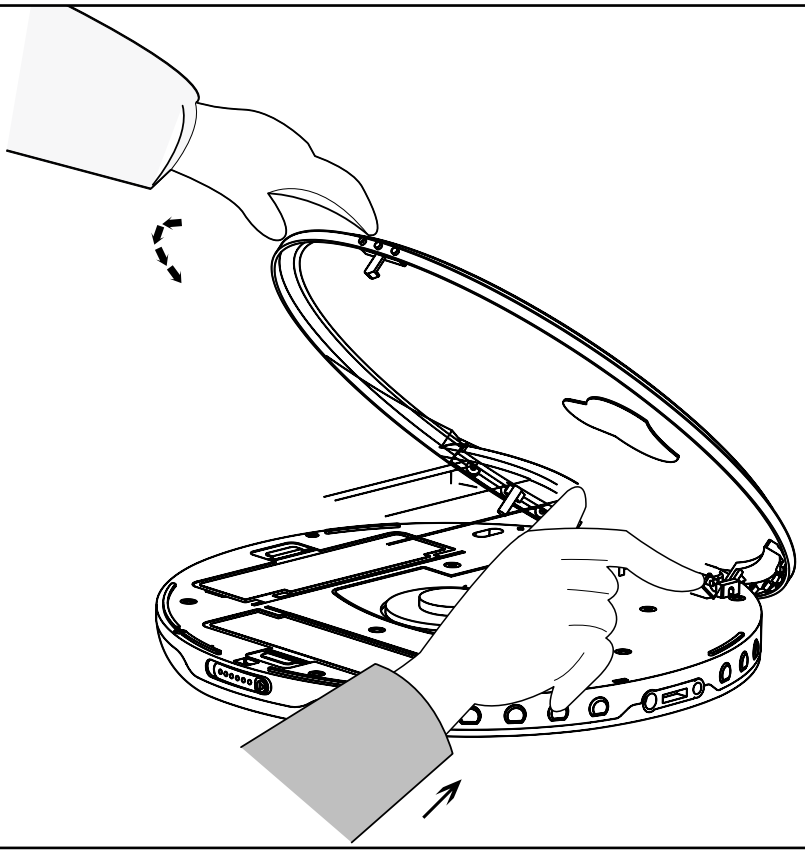

[Figure 2-9]

6. The bracket hinge is in place when it is in the position shown in Figure 2-10.
   Fasten the screw through the hole, as shown in Figure 2-10.

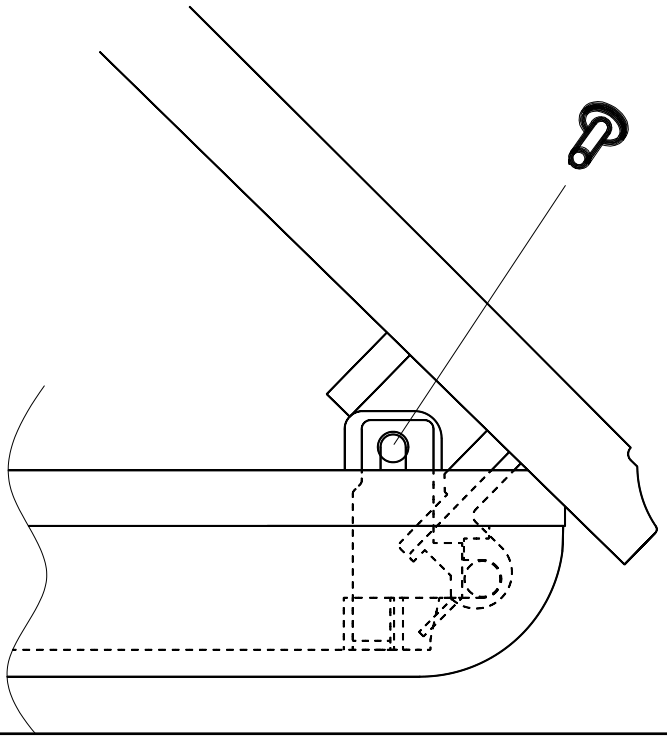

[Figure 2-10]

7. Insert the bracket hinge **D** at a 45 degree angle, as shown in Figure 2-11. Repeat steps 3,4,5 and 6 to complete this part of the assembly.

Finally, fasten the screw and close the cabinet door and then open it again to make sure that the cabinet door is correctly attached to the cabinet middle.

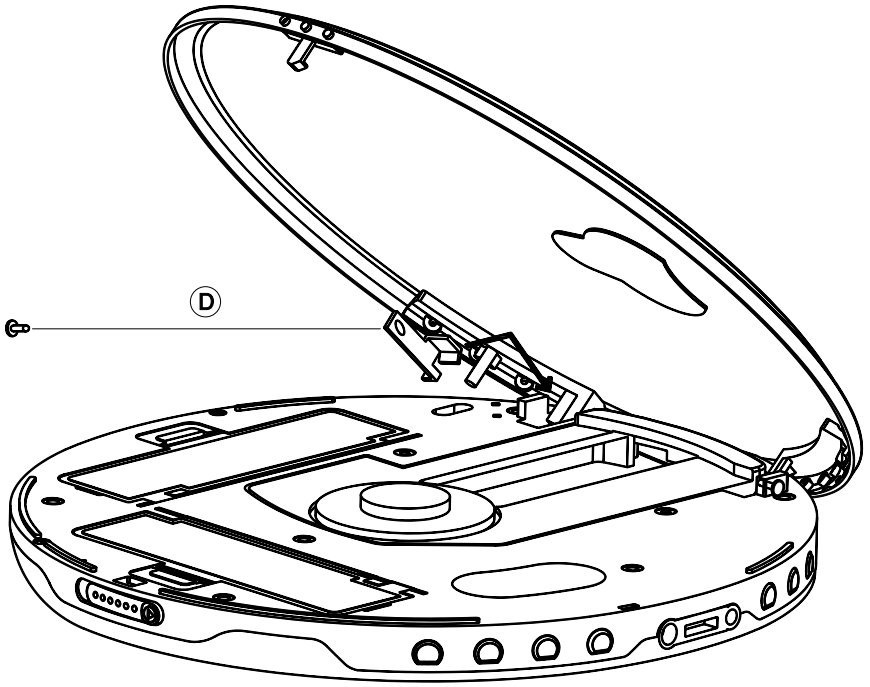

[Figure 2-11]